


T H E F U T U R E O F P R O M P T I N G

> **autoscript**
a clearer picture



> **autoscript**
a clearer picture

countries. (FIC)

Autoscript *n. Trade mark* the new definition of prompting.

autostrada *n* a motorway in Italian-speaking countries. (Italian, from *auto* car+ *strada* road)

autosuggestion *n* a process in which a person unconsciously supplies the
ing his own

Established in the UK in 1984,
Autoscript is a company with global presence, both in
terms of our company's US and UK offices, and our extensive network of
dealers and distributors throughout the world.

We provide a complete range of LCD teleprompters, PC cards and multilingual software to
an international market. Our focus as manufacturers has been on bringing superior design
and construction to every product, backed up by reliable customer support. You'll find
Autoscript products are flexible, easy-to-use and readily upgradeable. Autoscript hardware
and software are a favorite of both production and IT departments, who like our intuitive
software, and of talent, who like our clearer picture.

Autoscript provides products that support a variety of uses, whether for professional
broadcast environments, or educational and corporate settings, and you can count on
Autoscript's knowledgeable sales staff to help you choose the right solution to fit your
production and purpose.

*Our world wide partners
include some of the
broadcast industry's best
known companies:*



*Camera's loaned courtesy
of Metro Video, London*

Innovation lives at Autoscript

Voice activated prompting, wireless prompting, optical scroll controls with no potentiometer, a unique dual-color tally system - Autoscript has dedicated itself to creating the most advanced products in the field of prompting today.

At Autoscript, we have a history of quality engineering and accumulated industry knowledge and it shows in every product we design. Our latest innovation is the GoPrompt series of prompters - the world's first self-contained wireless prompter that is not dependent on a PC, laptop or other input system.

Whether you're interested in purchase or hire services, you can depend on Autoscript for state-of-the-art products that let users perform with confidence, anywhere and anytime.

Contents

GoPrompt Wireless Prompters	4
8" On-Camera Units.....	6
12" On-Camera Units	7
15" On-Camera Units	8
17" On-Camera Units	9
20" On-Camera Units	10
On Air Displays	11
12" Entry Level LCD Prompter	12
15" Entry Level LCD Prompter.....	13
Manual/Robotic Executive Systems	14
+Voice-Plus+	15
+WinPlus+ VGA	16
+WinPlus+ News N/NX	17
+WinPlus+ Studio	18
+ClockPlus+.....	19
Accessories.....	20

GoPrompt 12, Autoscript's wireless self-contained prompting solution. The GP12 is shown here with TFT 3.5 Preview monitor. (see page 4)

GoPrompt 12

GP12

Introducing a unique prompting solution, only from Autoscript: the GoPrompt 12. GoPrompt is a self-contained prompting system designed for fast moving news, field, or studio productions. Import scripts from a USB flash drive and begin prompting instantly - no laptop, no external cables, no hassle.

A wireless hand control, supplied as standard, enables the talent or operator to select a file from the runorder, then control the scroll speed of the prompted text. All WinPlus, Word, RTF and text files are automatically loaded and reformatted into prompted text. For extra support a 3" TFT monitor can be mounted on the side of the unit to allow preview of the script.

The GoPrompt 12 incorporates a robust, sunlight readable 12" TFT High Bright prompt monitor designed for use in the most demanding production environments. The unit can be powered by universal mains or 12 V DC. This uniquely compact system is available now, only from Autoscript. GoPrompt 12; truly a revolution in teleprompting.

GoPrompt 12 Product Specifications

- 1600 nits bright
- 9kgs/19lbs all up weight with hood and Mt/Red
- IEC 85-264 VAC input
- XLR 12v DC input
- BNC - 75 ohm Composite Video input
- BNC - 75 ohm Composite Video output
- Integral cue light with sensor
- 12v power output for 3.5" TFT
- 2 x USB2 ports
- 10/100Mb RJ45 input
- PS/2 mouse port
- PS/2 keyboard
- RF433 SMA antennae / 900mhz US version
- 9 way/D Com1 port for scroll control



Quick set up and operation are the key features of the GoPrompt 12. Go from start-up to prompting in one minute.



GoPrompt 15-News

GP15N



*Award winning
technology from
Autoscript*



Only from Autoscript, the Go-Prompt 15-News bringing studio size displays to fast moving News, sport and location productions. The Go-Prompt 15-News can be linked directly back to your Newsroom system and set up in minutes. Import your scripts directly from your Newsroom system or via a USB drive and begin prompting instantly.


No laptop, no external cables, no hassle.

All WinPlus, RTF and text files are automatically loaded and formatted into the prompt text. A wireless hand control, supplied as standard, enables the talent to control the scroll speed, load files and also move around the run order. For extra support a 3.5" TFT monitor can be mounted on the side of the unit to allow preview of the script.

The Go-Prompt15-News incorporates a robust, sunlight readable 15" TFT High Bright prompt monitor designed for use in the most demanding production environments. The Go-Prompt 15-News can be powered by either 12v DC or 110-240 AC.

GoPrompt 15-News Product Specifications

- 1600 nits brightness
- 10kgs 22lbs all up weight with hood and Mt/Red
- IEC 85-264 VAC input
- XLR 12v DC input
- BNC - 75 ohm Composite Video input
- BNC - 75 ohm Composite Prompt output
- Integral cue light with sensor
- 12v power output for 3.5" TFT
- 2 x USB2 ports
- 10/100Mb RJ45 input
- PS/2 mouse port
- PS/2 keyboard
- zF433 SMA antennae connector
- 9way/D Com1 port for scroll control



8" On-Camera Units

TFT8-P - TFT8-S & TFT8/HB-P - TFT8/HB-S

To add to the existing 8" TFT units, Autoscript have now added an 8" Hi-bright TFT to the range of portable prompting systems. The 8" units are exceptionally versatile prompters for location shooting, hand-held, Steadicam and small jibs. It is powered with 12v DC and has a composite video input with loop-thru. The unit is equipped with either a tripod mount or a handheld mount.

The tripod mount is supplied with a fully adjustable MT/Blue sliding mounting plate. The handheld mount utilizes the camera accessory boss and camera handle to rig the prompter. It is also supplied with a folding hood for easy transportation. The hood will remain out of shot on a 4.8 mm lens in 4:3 (standard) or 4.5 mm on a 16:9 (wide screen).

8" TFT On-Camera Units

Product Specifications

Brightness: 400 nits

Weight: 3.0kgs (6.6lbs)

Reading Range: 4 meters – 12 feet

Power: 12v DC 12 watts Hi Rose power input

Power Supply: External PSU

Input: VGA input - BNC 750 ohm
Composition Video input

8" TFT Hi-brightness On-Camera Units

Product Specifications

Brightness: 1500 nits

Weight: 3.5kgs (7.7lbs)

Reading Range: 3 meters – 9 feet

Power: 12v DC 12 watts Hi Rose power input

Power Supply: External PSU

Video Input: BNC 750 ohm Composition Video
input



12" On-Camera Units

TFT12HB-S / TFT12HB-P



The 12" TFT High Brightness on-camera units have been designed to meet the high demands of studio and location productions. Features include a unique sleep board that extends the life of the TFT screen, intuitive controls for picture adjustment, integral sensor cue light, and a choice of two hood assemblies - a folding hood for light and fast set-up/packaway, or a standard robust and lightweight ABS plastic hood. This on-camera unit includes a universal light-weight machined mounting plate with riser for use with all fluid heads.

12" TFT On-Camera Units Product Specifications

Brightness: 1600 nits

Weight: 8.8kgs (19lbs)

Reading Range: 3 meters – 9 feet

Power: 12v DC 34 watts

Power Supply: Internal PSU, 90 to 260v AC,
160v DC or 12v DC



15" On-Camera Units

TFT15HB-S / TFT15HB-P

The 15" TFT High Brightness on-camera prompter is a very versatile unit; equally comfortable in both studio and location applications. The 15" TFT has all the usual features of the Autoscript range and includes a studio/brightness selector. The unit comes complete with a built-in cue light and controls for color, brightness and contrast. A full on-screen menu allows for multiple image adjustments. Compatible with both the standard and folding hood. Traditionally used in conjunction with the Autoscript universal mounting plate.

15" TFT On-Camera Units

Product Specifications

Brightness: 1600 nits




Weight: 9.9kgs (21lbs)

Reading Range: 5 meters – 15 feet

Power: 12v DC 55 watts*

Power Supply: Internal PSU, 90 to 260v AC,
160v DC or 12v DC

** Note: 50 watt maximum consumption limit
modification available upon request.*



17" HB On-Camera Units

TFT17HB



17" TFT Hi-bright with
W17HD/SD SDI combination

The 17" TFT High Brightness panel is designed for the use within news or studio based productions. Exceptional brightness and readability make this the perfect choice for the most demanding situations. Lightweight design with exceptional construction, ensures continued reliability. Features include on-screen menu options for picture adjustment, sensor-driven built-in cue light, unique on board sleep mode for TFT longevity, VGA picture in picture facility and video loop through with termination. The 17" TFT can be used with the standard hood, wide angle, and extra wide angle hoods. MT/Red or Arri Plate are suitable for use when mounting with pan and tilt heads. Mounting rods can be supplied for pedestal applications or when used with a box lens.

17" TFT HB On-Camera Unit Product Specifications

Brightness: 1200 nits

Weight: 9.5kgs (20lbs) with Standard Hood




Reading Range: 6 meters – 18 feet

Power: 12v DC 65 watts*

Power Supply: Internal PSU, 90 to 260v AC,
160v DC or 12v DC

Video: Autosensing PAL/NTSC

** Note: 50 watt maximum consumption limit modification available upon request.*



20" On-Camera Units

TFT20-12XLW

The TFT 20" is the latest addition to the Autoscript teleprompter range. We have redesigned the body and included a built-in 'tally light'. It can be powered from AC or 12v DC. Video input is via BNC with loop thru or VGA input direct from a computer. It is supplied with a flatpack wide angle hood. The TFT 20" can also be used as a conference prompter or full color display monitor. Features include Picture-In-Picture facility with VGA.

The 15", 17", and 20" On-Camera Units are all available with optional video feedback monitor.

20" TFT On-Camera Units Product Specifications

Brightness: 500 nits


Weight: 12.4kgs (27lbs)

Reading Range: 7 meters – 25 feet

Power: 12v DC 50 watts

Power Supply: External PSU/IEC on-board mains, universal input or 12v DC

The 15", 17" and 20" On-Camera Units are all available with optional 17" TFT Hi-bright with W17HD/SD SDI and Clock-Plus combination



On Air Displays

W17 & W17HD/SD SDI



The Autoscript W17 and W17HD/SD SDI are the first wide screen monitors designed as on-air talent monitors. We have addressed all mounting, power, viewing angle and format issues associated with on-air talent monitors. Designed to work with our broadcast TFT 17" and TFT 20" on camera prompters, we offer unparalleled functionality. In addition to the technical merits, we have also addressed the aesthetics and functionality of these units so that they become an integral part of your studio. Manufactured and supported by Autoscript, the leader in prompting, the W17 and W17HD/SD SDI further our commitment; *new solutions for tomorrows applications.*

On Air Displays

Product Specifications

Power: 12v DC 40 watts

Power Supply: Internal PSU, 90 to 260v AC,
160v DC or 12v DC

Weight: 8lbs

Picture in Picture: Yes


Rack Mountable: 8 RU

Dimensions: 17" x 12" x 2 1/2"

Multi Format: W17: Autosensing NTSC, Pal,
SEACAM, S-Video: DVI-D and VGA
W17HD/SD SDI: Autosensing
NTSC, Pal, SEACAM, S-Video,
DVI-D, VGA, SDI and HDSDI



*MT-On Air Brackets for
mounting to 15", 17" and
20" TFT units.*



12" Entry Level LCD Prompter

ELP12-P

The ELP 12" Entry-Level LCD Prompter (ELP) is compact and lightweight. It has Composite Video VGA, S-video input. The monitor is supplied with an external 12v DC power supply. The ELP12" is suitable for all studio applications and as a flat screen upgrade for most CRT prompter monitors.

Recommended with the MT/Red machined mounting plate with riser.

12" ELP On-Camera Unit Product Specifications

Brightness: 450 nits

Weight: 6.4kgs (14lbs)

Reading Range: 4 meters – 15 feet

Power: 12v DC 16 watts

Power Supply: External PSU



12" ELP with Compact
Flatpack Hood and MT/red.

15" Entry Level LCD Prompter

ELP15-P



The ELP 15" TFT Entry Level Prompter (ELP) has Composite Video, VGA and S-video input. It is supplied with an external 12v DC power supply. This monitor is suitable for all studio applications and as a flat screen upgrade for most CRT prompter monitors. Recommended with the MT/Red machined mounting plate with riser. The screen is daylight readable and is supplied with a folding hood for portability. It will clear a 4.8mm lens in both 16:9 and 4:3 formats.

15" ELP On-Camera Units

Product Specifications

Brightness: 450 nits

Weight: 7.6kgs (16.7lbs)

Reading Range: 4 meters - 15 feet

Power: 12v DC 30 watts

Power Supply: External PSU



Manual/Robotic Executive Systems

MTS & MRFS

The Autoscript Executive Systems have been designed with knowledge gained within rental divisions over the last 25 years. The manual stands are robust and easily set-up. The glass holder is a geared bracket that adjusts the angle of the glass.

The Rise & Fall Motorized Robotic Stands offer the ability to adjust the height of the stands automatically. This can be performed by either programming the stands or using the Autoscript +WinPlus Conference+ software. The Rise & Fall Stand offers the flexibility for all variations and scenarios when used at awards ceremonies, conferences and presentations. Data control is via BNC 75 ohm cable; on-board video distribution amplifier with termination.

Manual Executive Stands

Product Specifications

Height Range: 130cm - 210cm (51.4" - 82.9")

Chrome telescopic stand

Black glass holder

Rise & Fall Executive Stands

Product Specifications

Height Range: 130cm - 210cm (51.4" - 82.9")

Chrome stand

Black glass holder


Power loop through

On-board 2 output VDA

75 ohm data distribution



➤ Relax, and we focus on you

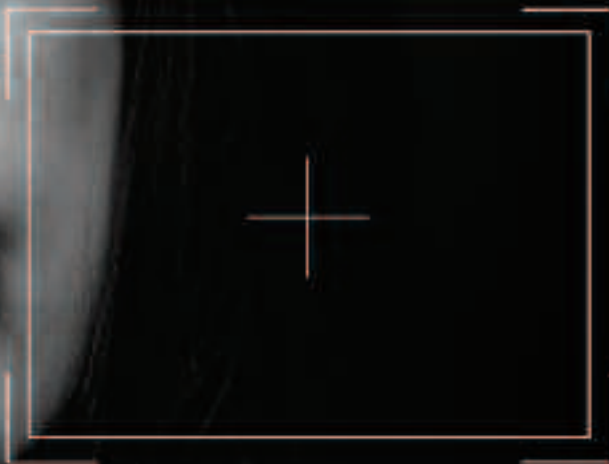

- No more foot or hand controls
- No training required
- No additional hardware
- Simply read the prompter

*Words are all we need
to make it happen for you...*

Voice-Plus⁺

Sold as an add on module to the Winplus software, the multiple award winning Voice-Plus+ eliminates the need for talent or operator to manually control the speed of the text across the Prompter Monitor.

Voice-Plus+ simply follows the spoken word of the talent.

Voice-Plus+ requires no training or learning cycles, the voice recognition intelligence is built in. An on screen message informs the presenter if Voice Activation is 'Enabled' or 'Deactivated'.

Operation of Voice-Plus+ is achieved by simply pressing the function button on either desk controls or the RAT (wireless hand control).



Voice-Plus⁺


Product Specifications

- OS; Windows XP Professional or above
- WinPlus PCI card or XBOX (WinPlus ISA not supported)
- Controlnet enabled -
- Opto HC/1, Opto FC, WFC (wireless foot control) and RAT control computer; Pentium 4, 2, 8 Ghz, 512 RAM
- Sound input; balanced feed
- 32 Bit PCI sound card required

+WinPlus+ VGA

WinPlusVGA

+WinPlus+ VGA is an entry level prompting system. It is a 'software only' application that only requires a dongle to operate, which is available in USB or parallel versions. A VGA-to-TV converter may be required if the PC or laptop will not provide composite video output. The program is a full-featured prompter software which includes run order management and user friendly drop down menus. Runs under Windows NT/W2000/XP, unicode compliant and offers multi-lingual prompting. Scrolling can be performed via the deskpadd scroll control which is included, or by the mouse/touchpad. USB scroll control is supplied as standard.

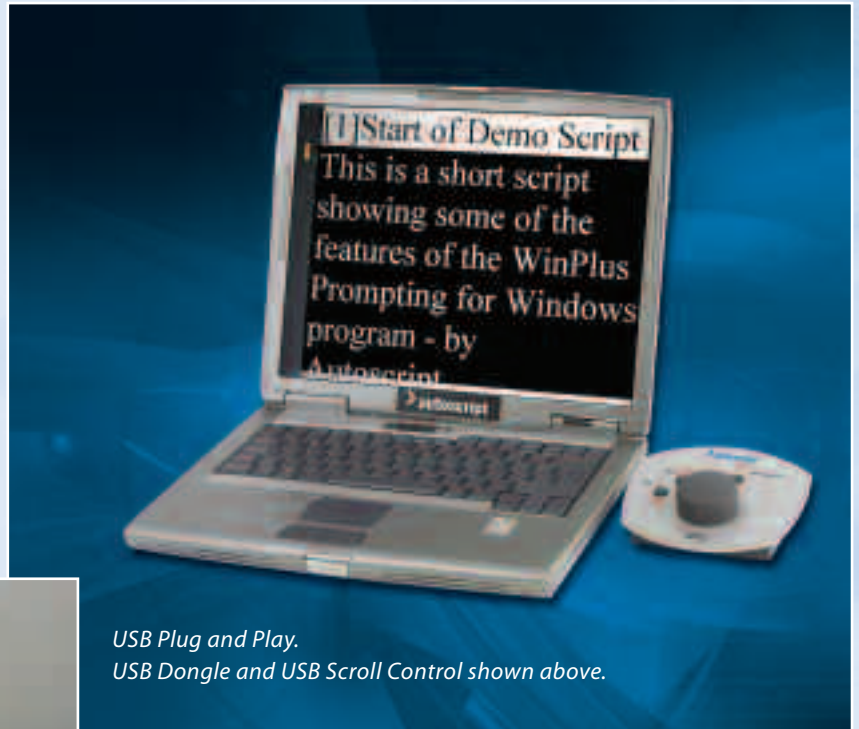

USB Plug and Play.

USB Dongle and USB Scroll Control shown above.



+WINPLUS+ VGA

Product Specifications

- Fully unicode compliant
- RTF and import facility for all leading WP systems
- Drag and drop from MSWord into runorder
- Dedicated scroll control
- Spell check
- Instant on-screen editing and changes
- Color, bold and highlight features
- Jump to script markers
- Dedicated USB scroll control
- Optional wireless scroll control (RAT2) can be used




Autoscript's partnerships enable us to offer seamless integration within the broadcast IT environment



+WinPlus+ News N & +WinPlus+ News NX

WinPlus News N, WinPlus News NX

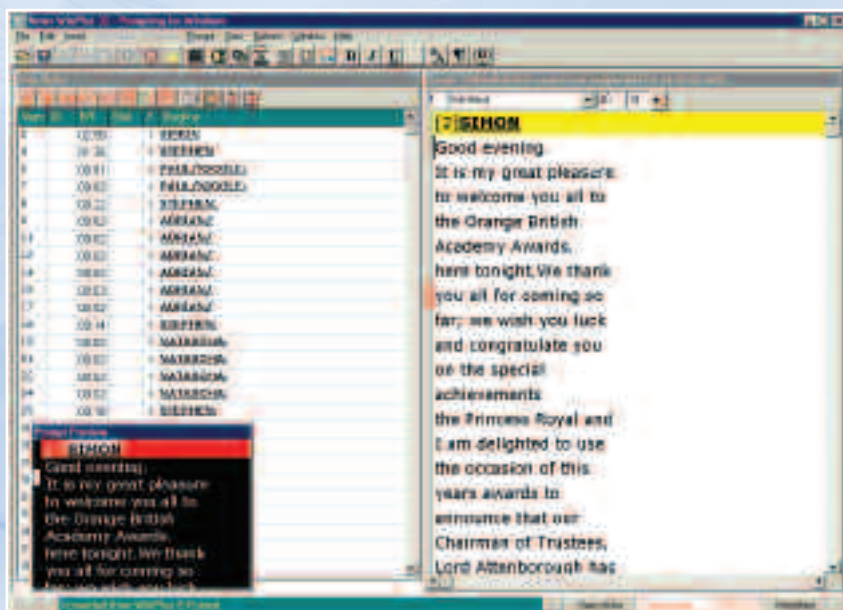

As the preferred choice of newsrooms worldwide, +WinPlus News+ software is an extremely powerful and versatile prompting package. User-friendly drop down menus and configurable display options add to its versatility. The +WinPlus News+ N package comes complete with a PCI Promptcard, which provides two video outputs (PAL/NTSC) and Genlock option. Autoscript now offers the WinPlus PCI Card with an optional SDI card with 5 video outputs. Also included is a configurable 5 button Despad Optical Scroll Control. +WinPlus+ News is compatible with all leading Newsroom systems including AP Newscenter, ENPS, i-News, Dalet, News Wire/Open Media, Newsmaker, Newstar. MOS Protocol: ENPS, News Works, Octopus and Eido Media. *(Please call Autoscript for more information if newsroom interface is not listed.)*

+WinPlus+ NX Studio News/Field News Production is laptop compatible.

The USB Xbox package has the same features as WinPlus N, but comes packaged with the USB interface.

+WinPlus+ News N/NX

Product Specifications

- HC/1 potless 5 button desktop control
- External box which connects via USB port
- XBox USB powered by external 12v DC PSU or battery
- PAL/NTSC video outputs
- Genlock option
- Colour options
- Timer options - background clock, background timer
- Background message options
- Presenter preferences
- Spell check
- Cut and paste
- Closed Caption options
- On-screen speed controller
- Word and RTF import and export
- ControlNet enabled
- Optional wireless capability can be added if specified



Autoscript's partnerships enable us to offer seamless integration within the broadcast IT environment



+WinPlus+ Studio

WinPlus S

+WinPlus+ is a Windows-based software package which adds the ease of 'point and click' to an intuitive on-screen edit display. It can provide stand-alone prompting for both presentation and general production, both in the studio and on location. Features include a fully active run order which can be manipulated at any time during scrolling, as well as instant prompt editing. Engineers, talent, IT departments and leading newsroom vendors choose +Winplus+ Studio because it delivers the flexibility and smart design a professional broadcast environment demands.

+WinPlus+ Studio Product Specifications

Point and click functionality

Intuitive operation

Unicode compliant

Import files in many formats

Export scripts and running orders


True multi-tasking

Use any scalable font

Any mix of fonts

Drop-down menus


Network and serial links

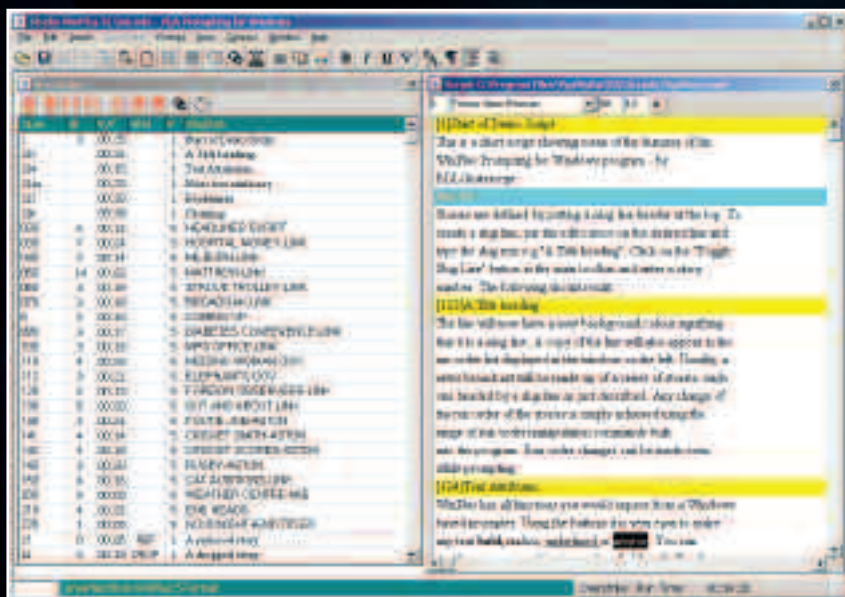

*Xbox USB interface,
offering a quick and
simple set up to all
laptops.*



Autoscript's partnerships enable us to offer seamless integration within the broadcast IT environment



+Clock Plus+



+ClockPlus+

The +ClockPlus+ is an LED SMPTE/EBU timecode display which has the added feature of changing colour from green to red when a suitable Tally input is applied. The clock face has 2.25" tall digits that display HH:MM:SS A/P in 12 hour mode or HH:MM:SS in 24 hour mode. The timecode input is taken from either VITC embedded in the video input or from LTC. When a time-code source is connected, the clock will instantly set itself to the input time. If the timecode source is removed the display will continue to update the time under control of an internal crystal oscillator.

+ClockPlus+

Product Specifications

Display:

Format: HH:MM:SS A/P

Size (HH:MM:SS): 2.25" (A/P): 1.5"

Linear Time Code Input:

Standard: SMPTE 12M linear time code -
24, 25 or 30 Fps nominal

Impedance: > 50k Ω , balanced

Connector: 3 pin male TiniQ-G miniature XLR

Level: 1v to 3.0 p-p

Vertical interval Time Code Input:

Standard: PAL or NTSC

Impedance: 75 Ω , balanced

Connector: BNC socket

Level: 1v p-p

Tally Control Input:

Type: Logic signal, low = green,
high (>2V) = red

Connector: 3.5mm mono jack socket,
sleeve = ground, tip = signal

Opto Sensor Input:

Type: Light dependent resistor, 20k Ω at
10 lux, 5K Ω at 100 lux OR
(grounding) contact closure



Accessories



OPTO 5 Button Desktop Control

HC/1

Potless five button desktop control offers rotary speed control for +WinPlus+ Studio and News. It includes page/bookmark/snapshot next or previous, back to top of script function, blank screen and a programmable function button. Suitable for use on locations or studios. Control Net Enabled.

Ergonomically designed • Rugged forming • Jog dial design with simple and clear buttons • Potless scroll for 100% reliability



Wireless Scroll Control

RAT

The RAT (Receive And Transmit) allows total freedom for the presenter to move around a studio and control the speed of the prompted text. Control of the prompted text is via a rocker pot for forwards and backwards direction, with a centre stop. Push buttons are provided for next and previous stories. A GPI interface is also provided for control of graphics or backgrounds.

The RAT interfaces with all the +WinPlus+ software packages and Smart Combi Control Net applications. Base receiver provided with channel selection.



Product Specifications

Weight: 1.6kgs (6oz)

Frequency: RF433mhz Europe / 900 mhz US

Power: 9v AA battery

Size: 11 x 4.5 x 3cm (4.3" x 1.7" x 1.2")

Channels: 0-9

Max Distance to Receiver: 150 metres (495 feet)

Unique one minute power save mode when idle

On/Off switch situated on the base of the control

Loop for lanyard strap at base

Receiver

Frequency: 900mhz - US/433mhz - Europe

Power: 12v external PSU

Data Output: BNC - 9 way/D

Channels: 0-9



Wireless Foot Control

WFC

Simply set the WFC in place and you are ready to prompt. The WFC can be run either AC or DC to allow maximum flexibility. Perfect to eliminate cable runs into hard to access areas or for mobility. The 900mhz (450 mhz outside USA), features a 10 channel system to allow multiple units on one system. WFC can be added to any existing system, either directly or via the Smart Combi Device.

Product Specification

Weight: 1.2kgs (2.6lbs)

Frequency: RF 900mhz - USA/433mhz - Europe

Power: 9v (AA Battery)

Channels: 0-9

Max Distance to Receiver: 150 metres (495 feet)

Receiver

Frequency: RF 900mhz - US/433mhz - Europe

Power: 12v external PSU

Data Output: BNC - 9 way/D

Channels: 0-9



USB VGA Scroll Control

HC/5

This rotary speed control for VGA +WinPlus+ offers center stop for forward and reverse, select next/previous page and top of script selection.

Ergonomically designed • Rugged forming • Jog dial design with simple and clear buttons

Accessories



Desk Pad & Foot Control

FCDP

This Potless Foot Control for 100% reliability can be used with +WinPlus+ Studio and News. The six button deskpad provides the ability to jump page, bookmark/snapshot to previous or next, blank screen, back to top of script and programmable function button. An additional button is included for forward and reverse action. Fully configurable to be used with Control Net.

Ergonomically designed • Rugged forming • Simple and clear buttons • Potless scroll for 100% reliability • Tough and durable design to the foot control.



Xbox USB Device

Xbox

Based on our successful PCI Prompt Card, the XBOX USB provides an external box solution for prompting. This is ideal for portable prompting. Just plug it into a laptop with a USB interface. The video output is standard composite PAL or NTSC and is compatible with all our flat panel TFT displays and conventional CRT-based on-camera units. It runs with exactly the same WinPlus versions that run with the PCI Prompt Card, no additional operator training required.

Standard USB interface • PAL/NTSC Color capable • Works with color version of +WinPlus+ software • Two composite PAL/NTSC video outputs • Genlock input • Works with original and new opto-scroll controllers • Low Power 12 volt operation • Docking mains power • VDA option • Perfect for location prompting • Optional wireless facility



Clip On Studio Module for XBox

XBOX VDA

The unit provides power through an IEC input and internal universal 110/240v AC PSU which power the XBox USB. It also includes a Video Distribution Amplifier to provide an additional four composite video outputs.

Universal 110/240v mains input • Four output VDA • Simple docking to the prompter module with built-in connectors • Purpose-designed rack mount tray available



Smart Combiner Box

SCB

Up to four Opto Hand or Foot controls can be used with the PCIPrompt card using the Smart Combiner box. The box plugs into the 9-way/D connector PCI Prompt card. It has four coax inputs that accept connections from the controllers via their associated coax adapters (see previous section for adapter details). Smart Combi's can be linked via standard 75 ohm coax cable and can be located up to 300 meters from one another.

Universal 110/240 mains input • Quick installation • Unlimited expansion capabilities via expansion connectors

Accessories



TFT 3.5" Monitor

TFT-3

New to the range of TFT monitors offered by Autoscript is the TFT 3.5". It's the perfect solution for location use for either operator preview or as a straight reading monitor mounted on the camera handle. Offers a scan reverse and direction switch. The TFT 3.5" monitor is built into a robust aluminum case.

Product Specifications

Brightness:	300 nits
Weight:	0.2kgs (1/2 lb)
Power:	12v DC 0.5 amps
Power Supply:	External PSU
Video Input:	75 ohm BNC
Controls:	Brightness, contrast, color, tint
	1/4" fixing for mounting



+TallyPlus+

+TallyPlus+ is a unique camera number system. A large LED indicator displays the camera in green (1-9) while in standby, then turns red when the camera is live. Switching from green to red is achieved by a photo electric cell that can be attached to the camera tally light. +TallyPlus+ retro-fits to the whole range of Autoscript TFT's and has the unique feature of a second photo electric cell built into the rear of +TallyPlus+ that docks with cue light on the TFT.

Product Specifications

Power:	12v DC 0.25 amps
Number Selection:	Rotary switch
Sensor Trim:	Rotary pot
	Optical sensor input
	Tally signal input from TFT
	External PSU supplied if required

+Dual Digit Tally Plus+

With studios increasing the numbers of cameras on the floor, it's essential the talent look to the right camera for transmission.


Another first by Autoscript, proving if the customer wants a solution to a problem, we solve it.



Product Specifications

Display:	Two 7 segment digits
Color:	Green (normal operation) Red (Tally activated)
Character Set:	0-99
Tally Input:	Senses light applied & switches display
Tally connector:	3.5mm Jack
Weight:	0.7lbs (280gms)
Dimensions:	W5.1" x H5.7" x D1.4" (W130mm x H88mm x D34.5mm)
Power:	12v DC - 2.1mm DC Jack
	Double digit display from 0-99

Accessories



6.8" TFT

PV-7

Operator 6.8" TFT Preview Monitor is the perfect solution to cut down on real estate in studio galleries or desktops. Lightweight and robust with exceptional viewing angle and brightness. Offers a scan reverse and direction switch.

Product Specifications

Brightness: 300 nits

Weight: 0.2kgs (1/2 lb)

Power: 12v DC 0.5 amps

Power Supply: External PSU

Video Input: 75 ohm BNC

Controls: Brightness, contrast, color, tint

1/4" fixing for mounting



Arri Mounting Plate

ARRI/MT

For the ultimate flexibility and rigidity for studio and film cameras. The Arri Mounting Plate is suitable for use with all pan and tilt heads and provides an outstandingly rigid mount for on-camera prompts up to the 20" TFT. The combination of the sliding rods and sliding base enables exceptionally quick and perfect balance with a wide range of cameras and pan and tilt heads.

Suitable for use with the 12", 15", 17" and 20" TFT's



Mt/Plate Red

MT/RED

The MT/Red plate is machined from solid aluminium for strength and lightness. An integral riser plate enables the camera to be raised. The sliding mounting rods ensure quick and simple set-up and balancing of the prompter.

Suitable for use with the 10", 12" and 15" TFT's



Mt/Plate Blue

MT/BUE

Machined miniature mounting plate for use with ENG and pan tilt heads. Perfect solution for DV cams and jib arms.

Suitable for use with the 6" and 8" TFT's



Mt/On-Air Brackets

MT/RETURN

Mounting brackets for the W17HD/SDI for use with 15", 17" and 20" TFTs.



S P E A K W I T H C O N F I D E N C E

Connecticut

391 Meadow Street
Fairfield, CT 06824 • USA

Tel: (203) 338-8356
Fax: (203) 338-8359

UK

Unit A8
Poplar Business Park
10 Prestons Road
London E14 9RL
Tel: +44 (0) 207 538 1427
Fax: +44 (0) 207 515 9529

www.autoscript.tv

Distributor: